

ALLEY-CAT

SKYLIFT

440-960-2100 | SKYLIFTUS.COM



ALLEY-CAT

MACHINE SPECIFICATIONS

WEIGHT:	6,000 LBS.
LENGTH:	CHASSIS 9'6" OVERALL 10'3"
HEIGHT:	6'7"
WIDTH	35" CLOSED – 50" OPEN
BASE:	HIGH-STRENGTH LOW-ALLOY STEEL CONSTRUCTION
DRIVE:	TWO SPEED PLANETARY REDUCTION
CARRIER	78" RUBBER TRACKS
TRACK ALARMS:	AUDIBLE ALARM ON RETRACT
TILT ALARM:	DIGITAL & AUDIBLE – SIDE TO SIDE – FRONT TO BACK
ENGINE:	22 HP HONDA GASOLINE - TIER 4 COMPLIANT
FUEL CAPACITY:	8 GALLON
HYDRAULIC OIL CAPACITY:	15 GALLON
PUMP:	10 GPM GEAR PUMP
OPERATING PSI:	2,300 PSI
CONTROLS:	FULL PRESSURE
LIFTING CAPACITY:	3,000 LBS.
AUGER DRIVE:	3,300 FT. LBS. OF TORQUE
AUGER STORAGE:	TRAILER MOUNTED STORAGE CONTAINER
ROTATION:	440 DEGREE / HIGH STRENGTH BALL BEARING
WORK ZONE:	UNLIMITED
PAD MOUNT TRANSFORMER DECK:	INTEGRATED / 1,500 LBS. RATING
TRANSFORMER DECK DIMENSIONS:	40" WIDE X 43" LONG
SHEAVE HEIGHT:	21'
WORKING HEIGHT:	25'
SIDE REACH:	16'
DIGGING RADIUS:	10'
BOOM ASSEMBLY:	3 SECTION INSULATED ALL HYDRAULIC EXTENSION
LIFT CYLINDER:	5" BORE LIFT CYLINDER
BOOM ANGLES:	-5 DEGREES / +75 DEGREES
INSULATION:	46KV CATEGORY C PER ANSI 92.2
BUCKET CAPACITY:	300 LBS
OUTRIGGERS:	RADIAL TYPE
OUTRIGGER SAFETY:	OUTRIGGER INTERLOCK SYSTEM
OUTRIGGER SPREAD:	FRONT/BACK: 6'8" SIDE/SIDE: 9'7"
AUXILIARY POWER:	HYDRAULIC TOOL CIRCUIT AT GROUND (FRONT & BACK) & BOOM TIP
GROUND PRESSURE	5.2 PSI
GROUNDING LUG:	STAINLESS LUG ON DECK
POLE CARRIER:	OUTRIGGER MOUNTED FORGED D-RING BRACKET

OPTIONS

HYDRAULIC POLE GUIDE (MANUAL TILT)

SINGLE MAN BUCKET (300 LB. CAPACITY)

CAPSTAN WINCH

PIN ON AUGER ASSEMBLY

TRANSFORMER / MATERIAL HANDLING JIB

HYDRAULIC HOSE REEL FOR TOOLS @ GROUND

RADIO REMOTE CONTROLS HANDHELD (Includes Start/Stop)

AUDIBLE ALARMS FOR OUTRIGGERS

TOOL OUTLETS @ BOOM (NEEDED FOR PIN ON AUGER ASSEMBLY)

4 THERMOPLASTIC MOBILE MATS 2' x 8' LONG

STORAGE BRACKET FOR GROUND MATS ON TRAILER

REAR WINCH RECEIVER BRACKET

KELLY BAR EXTENSION

PINTLE EYE EXTENSION ON TRAILER & EXTENDED SAFETY CHAINS

SPARE TRAILER TIRE

BRACKET FOR SPARE TIRE STORAGE ON TRAILER

SCREW ANCHOR ASSEMBLY

BRACKET FOR SCREW ANCHOR

ELECTRIC TONGUE JACK

SINGLE PHASE LIFT ARM

WORK LIGHTS


SET OF (4) PLASTIC 18 x 18 x 1.5" OUTRIGGER PADS

RECOMMENDED TRAILER: 14' / 14,000 LB. GVWR UTILITY TRAILER



ALLEY CAT

SAFE WORK LOADS

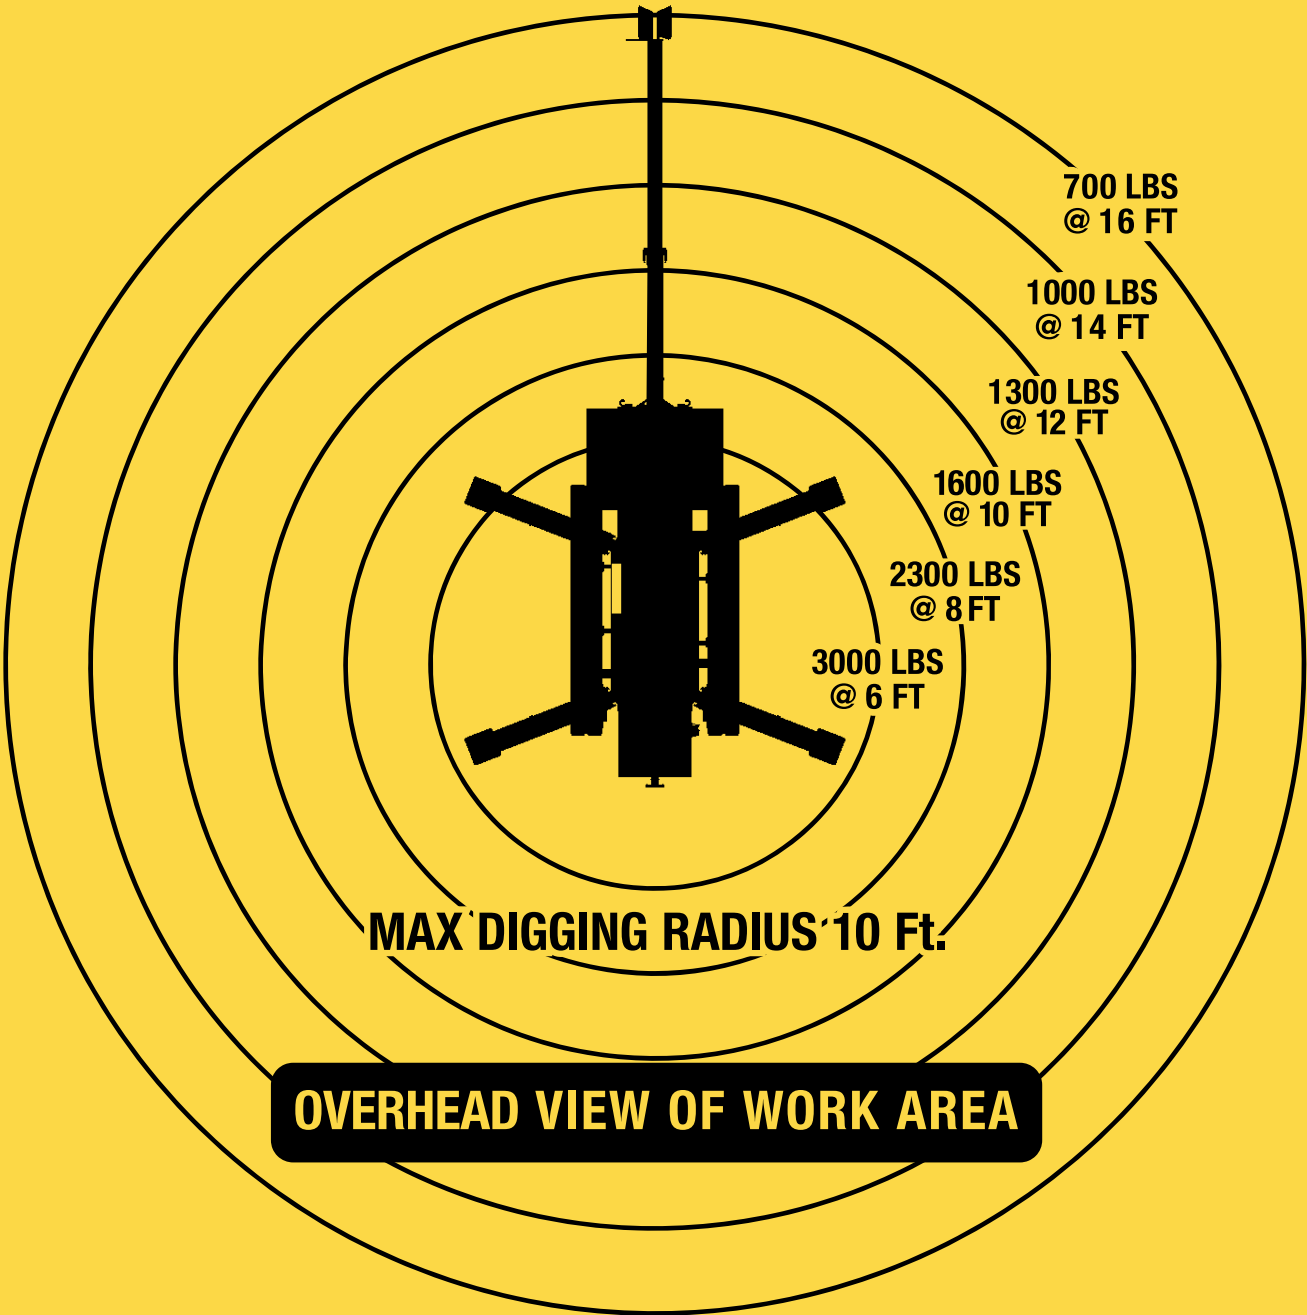

MAX DIGGING RADIUS 10 Ft.

OVERHEAD VIEW OF WORK AREA